


## LCD 24" Professional CCTV Monitor

<b>Display</b>	Screen Size	24 Inch
	Max. Resolution	1920 x 1200 @ 60Hz
	Pixel Pitch	0.270 x 0.270mm
	Brightness	400cd/m2
	Contrast Ratio	1000 : 1
	Aspect Ratio	16:10
	Viewing Angle (H/V)	178° / 178°
	Display Colour	16.7 Million
	Response Time	< 16ms
	Video System	NTSC / PAL
<b>Audio</b>	Frequency (H)	30~80 KHz(H)
	Frequency (V)	56~75 KHz(V)
<b>Audio</b>	Built-in Speakers	Yes ( 2W x 2)
	Gradual Volume Increase	N/A
<b>Interface</b>	Video In / Out (BNC type)	2/2
	S-Video In / Out	1/1
	RGB In (15Pin D-sub)	1
	DVI / HDMI	1 / 1
	Audio In / Out (RCA type)	2
<b>Transmitter</b>	PC Stereo Input	1
	Remote Controller	Yes
<b>Special features</b>	PIP (Picture In Picture)	PIP / PBP
	Filter type	3D Comb Filter / De-Interlace
	LCD Protection Glass	Yes
	Rack Mountable Kit	Optional
	Multi-lingual Language	English, Spanish, French, German, Italian
<b>Special features</b>	Camera Mounting Hole	2(Upper/Bottom)
	VESATM DDC Compatible	Yes
<b>Dimension</b>	Outline Dimension	572 x 384 x 94 mm
	Net Weight	9 Kg
	Gross Weight	11 KG
<b>Cabinet</b>	Finish / Tilt Stand	Black / Yes
<b>Mounts</b>	VESA Mounts size	100 x 100mm (BS M4 x 10mm Screw)
<b>Warranty</b>	Parts / Labour	2 Year - New for OLD
<b>Regulations</b>	MTBF (Approx.)	50,000 hours
	TUV-NRTL (Same as UL), CB, FCC(B), CE-Emc(LVD)	
<b>Power consumption</b>	< On / < Stand-by	<45 W / Power Saving (EPA,VESA DPMS, Nutek Compliant AC100~240V (50/60Hz)
<b>Power type</b>	Electrical Ratings	
<b>Environment</b>	Operating Temperature	10~40°C / 50~104°F

### 24RTC

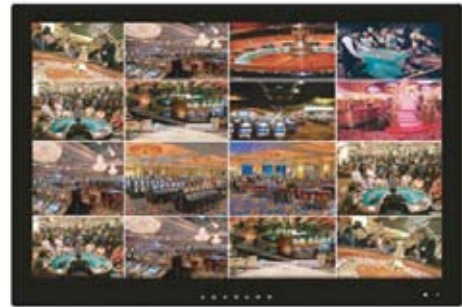

### Features

LCD Hard Glass Protection  
 Full HD 1920 x 1200  
 Multiple Connection:  
 BNC 2 x In / Out  
 S-Video In / Out  
 3D Comb Filter / Deinterlace  
 Built-In Speakers  
 <16ms response, 1000:1 Contrast  
 Built for 24x7x365 Operation



Hantarex International Ltd  
 Unit 14 - Forest Hill Business Centre  
 Forest Hill  
 London SE23 3JF

Phone: +44(0)20 8778 1414  
 Fax: +44(0)20 8659 9348  
 E-Mail: sales@hantarex.com