

Ultra View Angle LCD



17"



Specifications


Model Name	R17L500-CHA3
Viewable Size Image	17"
Active Display Area(mm)	337.92(H)x270.34(V)
Pixel Pitch(mm)	0.264(H)x0.264(V)
Number of Pixels	1280x1024
Contrast Ratio	700:1(typ.)
Display Color	16.2M (6bits+FRC)
Brightness(cd/m ²)	300(typ.)
Viewing Angle(CR>=10)	-75~75(H);-65~75(V)
Synchronization Range	64.0~80.0KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1280x1024@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	38W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive,Capacitive,SAW,IR

Remarks:R17L500 series= VGA Input only
 R17L540 series= VGA+Video Input

The Hantarex Semi Pro range of small, LCD chassis displays are housed in sleek metal housings which give them a custom design look. Wall mounting is achieved using a rear VESA connection.

They are offered in many different sizes from 6.5" in a 4:3 format up to 26" in a 16:9 format. They all have a standard PC (VGA) input but in addition can have video (PAL) and DVI inputs. The choice of screens is also impressive with standard, touch and transfective available.

Mechanical Drawing

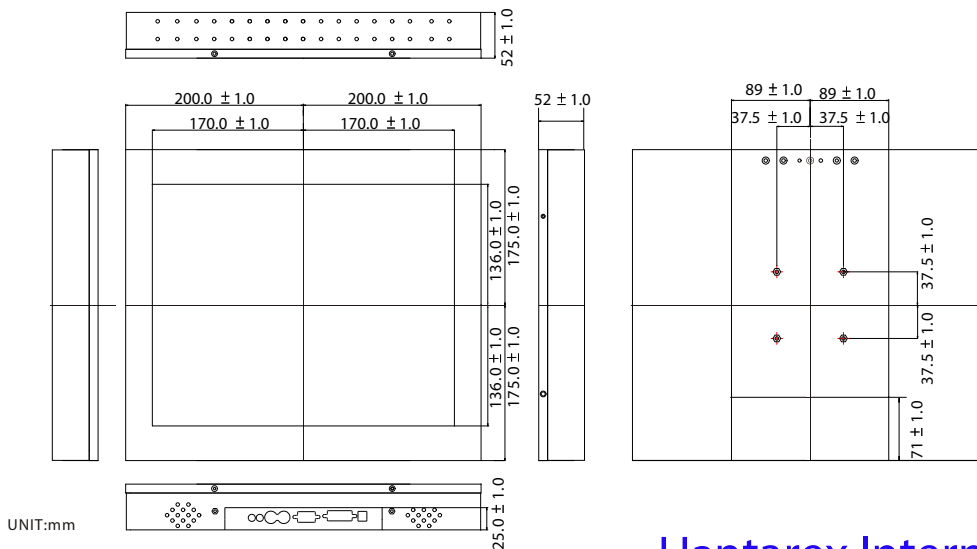

Hantarex International Limited

Unit 14 - Forest Hill Business Centre, Forest Hill, London SE23 3JF
 Phone: +44(0)20 8778 1414 - e-mail: sales@hantarex.com - web: www.hantarex.com