LCD Monitors

LCD 32” Advertising Display

	Monitor Technical Specification	
	Product Name	**LCD32" AD Display - PF32A1**
Display Panel	Screen size:	32" (81cm) diagonal
	Resolution:	1366 x 768 pixels (16:9)
	Active area:	696.2 mm (W) x 391.6 mm (H)
	Brightness:	450 cd/m² (typical)
	Contrast ratio:	3000:1 (typical)
	Viewing Angle:	H: 170º , V: 170º
	Colours:	16.77 Mil
Features	Media Format:	JPEG, MP3
	Media Card:	CF / SD
	Memory:	2 GB
	Import File:	USB
	Audio:	Integrated 2W, 8Ω speakers
	Default start mode:	JPEG, MP3
	PC Connection:	Not available
Controls	Video:	Brightness, Contrast, Colour, Sharpness, Hue
		Colour Temperature (4 selections)
		Source selection
	Control Interfaces:	Local Keyboard (OSD assisted)
		Infrared Remote Control (OSD assisted)
		RS232 Serial Port
Physical	Dimensions:	805 mm (W) x 495 mm (H) x 89 mm (D)
	Weight:	20.5 Kg (net)
	Mains Voltage	110/240 Vac ± 15%, 50/60 Hz
	Power :	190 W
	Operating Temp:	0ºC to 40ºC (max 75% RH not condensing)
	Storage Temp:	-20ºC to 60ºC (max 75% RH not condensing)
User		Remote Control
		AC Power cable
		CD (User manual and software)
		Wall mount
		SD Memory Card

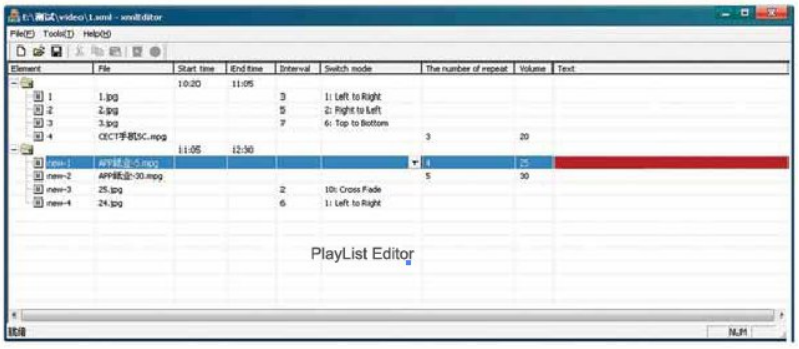

Edit play list:
In a play list, set up a group and add items into it. Set a start and a stop time for each group. Change the switch mode and interval time of JPG files, number of repeats and volume of MPEG files.

Set up a folder named “Loop” and copy the play list and all related JPG, MPEG and MP3 files into it. Insert the card into the display and it will display the files automatically

- Displays HD pictures in a loop
- Powerful play list editor and timer
- Programmable start and stop times
- Easy to copy files through USB port or memory cards
- JPG and MP3 files matched to create attractive sound effect
- Split screen feature enables display of message ticker
- Optional Black finish version

This new range of LCD displays is purpose built to operate as an advertising display suitable for applications in retail; public service such as hospitals, financial institutions and places of entertainment such as a gym or cinema. They are supplied with a wall mount for mounting in portrait mode.

Each display includes an integrated media player that will accept CF or SD media cards or USB memory sticks.

If you have an application where a continuous display of images or text is required and where the data is only changed occasionally but with ease, then this is a very cost effective solution.

Simply insert a SD Memory Card and power on. The screen automatically starts playing the images, video and music that are loaded onto the card. You can set the play order and interval time of each slide and start and stop times, giving you complete control over every aspect of your digital presentation.

Hantarex have a policy of continuous development and reserve the right to change specifications and descriptions without prior notice. All trade marks acknowledged. LCD PF32A1

Hantarex International Limited
Unit 14 – Forest Hill Business Centre
Forest Hill
London SE23 3JF

www.hantarex.com

For further details e-mail: sales@hantarex.com
Tel: +44(0)20 8778 1414 Fax: +44(0)20 8659 9348