




DIGITAL SIGNAGE SOLUTIONS

46", 57", 70", 82" LCD MONITOR
Multimedia TOTEM
OUTDOOR/INDOOR series

A NEW WAY TO INFORM



**IMBARCHI
Gates A-B** →

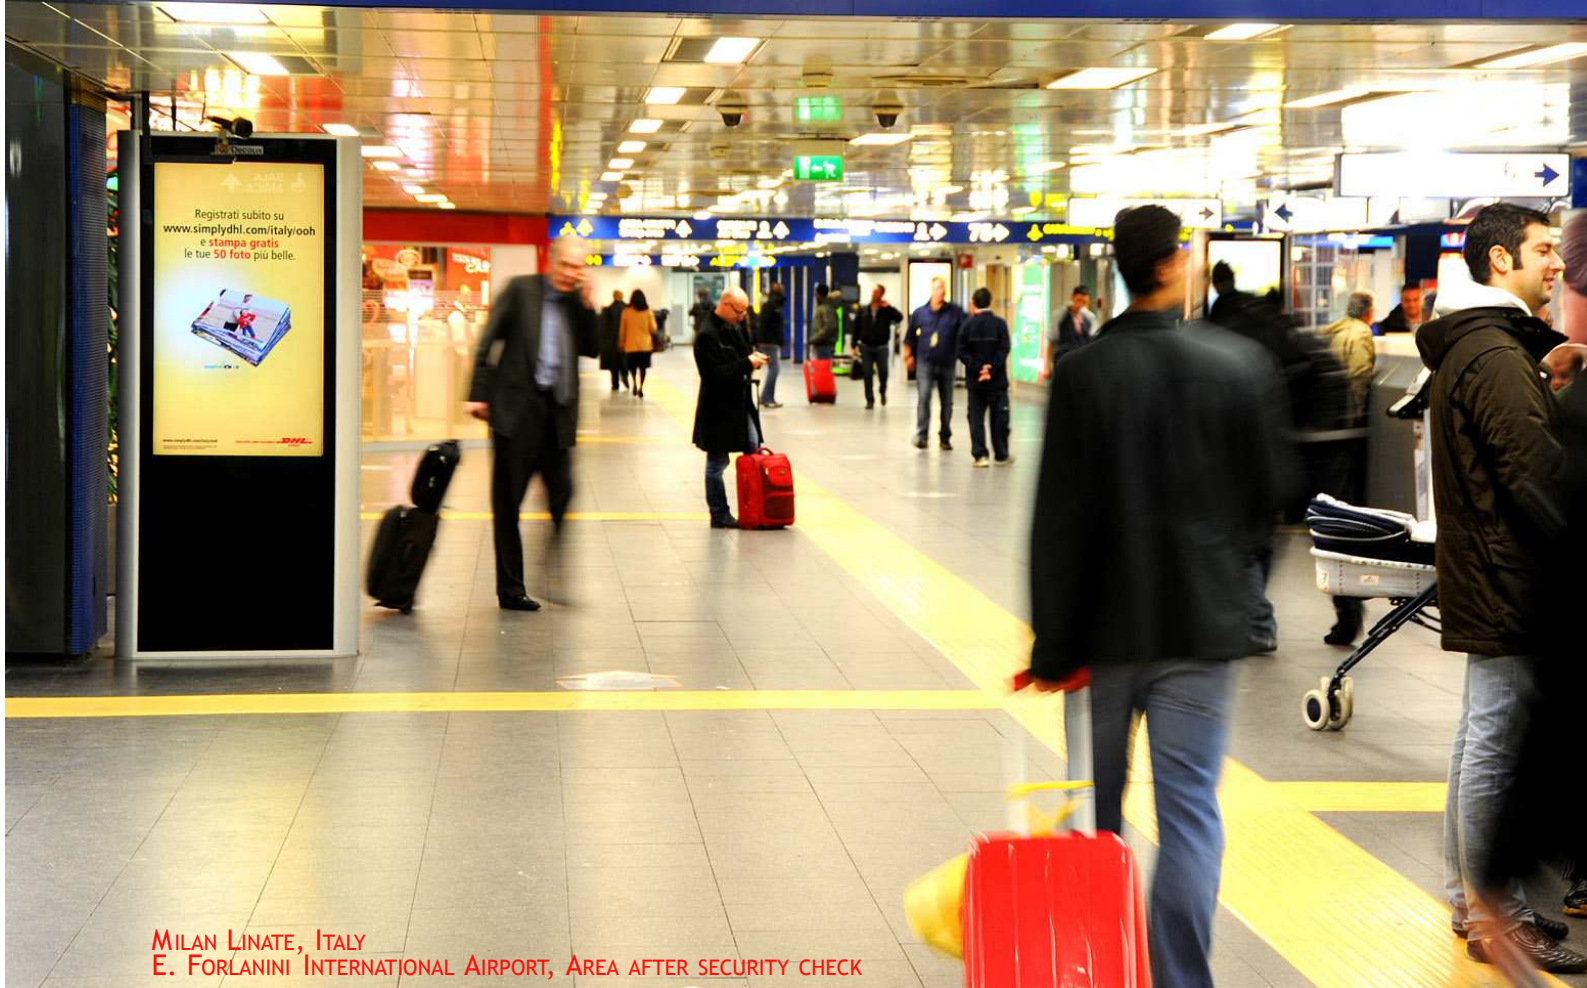

**MILAN LINATE, ITALY
E. FORLANINI INTERNATIONAL AIRPORT, AREA AFTER SECURITY CHECK**

APPLICATIONS OUTDOOR&INDOOR

ADVERTISING & RETAIL MARKETING

Information and entertainment in public places, of high traffic and waiting areas, maps and information at fairs and special events, service information at stations and airports.

PROXIMITY MARKETING

Information directed at viewers passing near the device through integrated Blue-Tooth antenna, Wi-Fi and proximity sensors.

DIGITAL IN-STORE

Promotes products: Electronic and interactive show cases, menus and specials for restaurants, programs and promotions for theaters and multiplex movie theaters including trailers, seat availability and reservations.

DIGITAL SIGNS

Electronic signs to manage publicity at stadiums, malls and during exhibitions and shows.

OUTDOOR/INDOOR INFOTAINMENT

Tourist information: reception for tourist offices, hotels, restaurants, mass transit, etc., interactive maps and itineraries for tourists, historic and cultural information and event calendars.

CORPORATE TV & WEB TV

TV and/or Web TV companies to broadcast press releases and present new products, connect various offices and/or branches for company-wide events, virtual communities with bulletin boards, multimedia blogs or company intranet.

MOVING MEDIA

Infotainment channels on board trains, busses, airplanes and ships to broadcast information and pertinent programming; travel portals and interactive kiosks with integrated automatic ticketing machines.

A NEW WAY TO COMMUNICATE.

See, hear, touch and interact and EXPERIENCE of PROXIMITY COMMUNICATION & MARKETING.

An experience of interacting with a new tool that puts the user in contact with the outside world. Activate a digital interface with a simple passage to dialogue with the network by simply touching with your fingers. Use sounds, images and sensations to attract the attention of passer-bys with a single product, a Totem.

A Totem that informs, gathers comments, creates participation and allows information to be gathered, votes to be made and opinions to be expressed.

A Totem that prints street maps and allows ring-tones, video clips, trailers, music and anything that entertains to be downloaded.

A Totem that senses the presence of and recognizes passer-bys with an integrated Blue-Tooth antenna and proximity sensor.



46"

57"

70"

82"

FEATURES AND HIGHLIGHTS:

MECHANICAL STRUCTURE

- Reinforced aluminum alloy and crystal structure with IP65/54/30 compliance, with Italian design finishings
- Shatterproof anti-vandal/theft structure with arrangements for safety clamps and plugs
- Bulletproof safety front crystal with special UV FILTER
- Special 'Compass-opening system*', to allow an easy maintenance/service and cleaning. *(available on several models)
- Special internal AIR-CONDITIONING system (available on IP65 Outdoor models), to maintain the working temperature between 0° and 50°C
- Special registered 'NO ISOTROPIC EFFECT system' (available on IP65 Outdoor models), to prevent the display 'blackening' (also with Direct Sun applications)
- Sistema 'anti-umidità', che previene la condensa e l'eccessiva umidità interna
- STANDARD ARRANGEMENTS for optional devices: PC (both for Single or Double Side versions), WebCam, Wifi, Bluetooth, GPRS, Touch Screen, with heater, insulation, punching bar and metal cling bolt plate

ELECTRONIC AND TECHNICAL PLUS

- Breaker fuse
- Service internal plugs
- Recovery switch
- Keyboard IR receiver
- Shock sensor
- Audio with integrated speakers

SOFTWARE

- Complete DIAGNOSTIC STANDARD CHECK (for the Embedded PC models), comprises:
- automatic switch OFF, when the temperature exceed the limits
 - monitor status check via serial protocol RS232
 - check working temperature check
 - fan status check (On/Off)
 - ambient light sensor (auto-dimming)
 - shock sensor check (via optional module)
 - fan speed regulation (via optional module)

OPTIONAL

- PC kit Digital Signage: integrated controller 'Core i' family, XP/Seven O.S. included
- Metal cling bolt plate kit to cling the totem to the ground and allow the 'compass opening' movement
- GPRS modem Kit
- WI-FI antenna 802.11 Kit
- WebCam 2Mp Kit
- Capacitive Touch Screen with frontal antivandalic overlay
- 250 W integrated heater kit, with thermostat (-40° + 40°)
- Insulation kit
- Punching bar kit
- Customisation kit for ADV panel
- Customisation kit for RAL painting colour
- Customisation kit for LOGO



ABANO TERME (PD), ITALY - DOWNTOWN



WIEN (AUSTRIA), DIGILIGHT URBAN NETWORK



OUTDOOR & INDOOR



**Standard features - OUTDOOR IP65 TOTEM
HB 1.500 cd/mq SINGLE SIDE/DOUBLE SIDE**

- compliance IP65
- 46" High Brightness (1500 cd/m2) panel
- Depth 170 mm (Single) - 290 mm (Double)
- Compass Opening system
- Air-Conditioning system KP172 - 5600 Btu/h
- Silkscreen Black short Crystal
- Integrated safety Alubond panel
- Ambient Light sensor
- Shock sensor
- Proximity sensor
- Safety clamps
- Audio with integrated speakers
- Breaker fuse
- Service internal plug
- PC arrangement (over Single and Double Side)
- WebCam arrangement
- Wifi/Bluetooth/GPRS arrangement
- Heater and insulation kit arrangement
- Punching bar arrangement

**Standard Features TOTEM IP54 INDOOR/OUTDOOR
700 cd/mq SINGLE SIDE/DOUBLE SIDE**

- compliance IP54
- 46" Standard Brightness (700 cd/m2) panel
- Depth 170 mm (Single) - 290 mm (Double)
- Compass Opening system
-
- Silkscreen Black short Crystal
- Integrated safety Alubond panel
- Ambient Light sensor
- Shock sensor
- Proximity sensor
- Safety clamps
- Audio with integrated speakers
- Breaker fuse
- Service internal plug
- PC arrangement (over Single and Double Side)
- WebCam arrangement
- Wifi/Bluetooth/GPRS arrangement
- Heater and insulation kit arrangement
- Punching bar arrangement

**Standard Features TOTEM IP30/IP54 INDOOR
600 cd/mq MONO/BIFACCIALE:**

- compliance IP30/54
- 57" Standard Brightness (600 cd/m2) panel
- Depth 170 mm (Single) - 290 mm (Double)
- Compass Opening system
-
- Silkscreen Black short Crystal
- Ambient Light sensor
- Shock sensor
- Proximity sensor
- Safety clamps
- Audio with integrated speakers
- Breaker fuse
- Service internal plug
- PC arrangement (over Single and Double Side)
- Wifi/Bluetooth/GPRS arrangement
- Heater and insulation kit arrangement
- Punching bar arrangement

USCITA



RETAIL AND COMMERCIAL ADVANTAGES

The conventional means to communicate. Publicity such as posters and bill boards offer companies the possibility to sell space ambiguously or at least defined. The space purchased by a client is sold by size, position and duration of the campaign.


The publicity company can sell the space to a single client for a determined period. With HANTAREX totem, the same space can be sold to many clients at the same time by breaking up the length of time the ad is displayed. The space can be sold many times, the content changes according to a schedule that can be set as you please. The return on investment is much higher for the client that pays according to the number of people that pass, not the location and the size, and for the publicity company that can sell the same space many times without maintenance costs because the content can be uploaded to the Totem via remote control or wireless.

AN INTEGRATED PC CAN MANAGES:

- multimedia files
- text, models/documents of any type
- images
- cartoons
- audio play lists
- web pages
- rss feeds

MAIN INSTALLATIONS:

- airports, bus stations, train stations
- ports
- subways
- parking lots and structures
- retail outlets
- malls, sport centers and arenas
- convention & trade centers
- stadiums and theaters
- playgrounds and amusement parks
- military bases

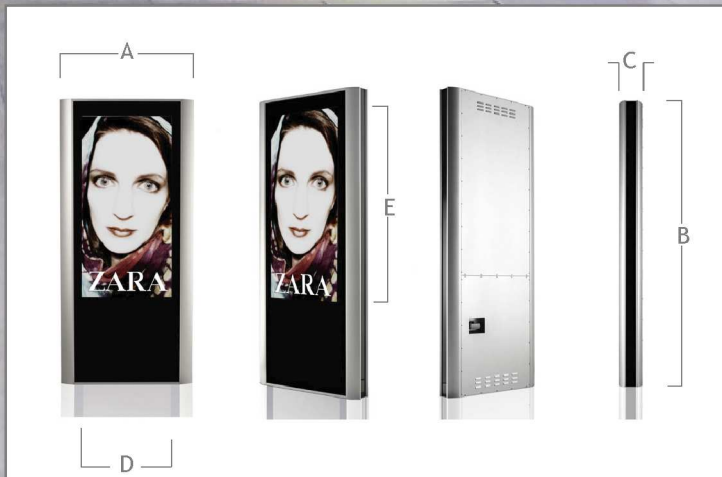

GENERAL DIMENSIONS	A	B	C	D	E
46" HB AC SS	876	2290	290	570	1015
46" HB AC DS	876	2290	290	570	1015
46" 700 AC SS	876	2135	290	570	1015
46" 700 AC DS	876	2135	290	570	1015
57" 600 SS	1000	2250	170	701	1248
57" 600 DS	1000	2250	290	701	1248
70" 600 SS	1140	2350	170	806	1434
82" 600 DS	1325	2600	170	1013	1796

NEW TOOLS TO COMMUNICATE

MAIN FEATURES

- Stable, robust solution based on aluminum structure
- Single Side And Double Side configurations
- High reliability and lifetime
- Full stable 24/7 solution
- Optimized thermal design
- Sun Direct support
- High brightness (1500 cd/sqm)
- Full support for outdoor and critical environments
- Ambient light sensor
- Shock sensor
- Infrared mouse/keyboard
- Quick clams with safety lock
- Overload switch with breaker fuse
- service internal plug
- Widely customizable
- Compass opening for fastest maintenance
- Italian design
- Stainless steel base

OPTIONALS

- Integrated PC
- Integrated VGA/HDMI extender
- WINDOWS XP/7 Operating System
- WiFi kit
- Bluetooth support
- WEBCam
- Wheels KIT (only for trasportation use)
- Anti-Reflective/Anti-Glare treatment
- Internal audio glass speakers
- RFID reader
- SMARTcard reader
- Barcode reader
- Capacitive TOUCH SCREEN
- OUTDOOR insulating KIT
- Heating KIT *(RANGE - 20° / +40°)
- UV filters
- Special Safety clamps
- 3G router
- Extra antimoisture kit
- Punching bar kit
- Custom height
- Custom colors
- Custom logo



OUTDOOR & INDOOR

MILAN MALPENSA
INTERNATIONAL AIRPORT, AREA AFTER SECURITY CHECK

TECHNICAL SPECIFICATIONS

CASE	Hantarex TOTEM 46 HB IP65 Air Conditioning SINGLE SIDE or DOUBLE SIDE	Hantarex TOTEM 46 700 cd IP54 SINGLE SIDE or DOUBLE SIDE
Materials	Body: extruded painted aluminum Interior: aluminum and steel Front bottom: Alubond	Body: extruded painted aluminum Interior: aluminum and steel Front bottom: Alubond
Available versions	Single Face Double Face High brightness With Air Conditioner	Single Face Double Face Standard brightness Without Air Conditioner
Ventilation Air Conditioner	Optimized airflow 5600 BTU /h IP65	Optimized airflow -
Protection degree against wate and dust	IP65	IP54
Opening Glass	Compass opening Laminated, antivandalism, antireflective or antiglare, antistatic, multilayer 3 mm+ 3mm + 0.38 mm PVB foil	Compass opening Laminated, antivandalism, antireflective or antiglare, antistatic, multilayer 3 mm+ 3mm + 0.38 mm PVB foil
External cables	Power with IEC plug 2P+G 230V 16A CAT5 for LAN (RJ45) Serial for tuning extender (RJ11)(option) USB cable for access from USB 2.0 device RAL9006 (or other on request) On request	Power with IEC plug 2P+G 230V 16A CAT5 for LAN (RJ45) Serial for tuning extender (RJ11)(option) USB cable for access from USB 2.0 device RAL9006 (or other on request) On request
Color Custom Logo		
MONITOR	MONITOR	MONITOR
Technology	LCD TFT	LCD TFT
Dimensions	46" (117 cm)	46" (117 cm)
Format	16:9	16:9
Resolution	1366 (H) x 768 (V) pixel (versions high brightness)	1920 (H) x 1080 (V) pixel (versions standard brightness)
Pixel pitch	0.74 [mm]	0.74 [mm]
Display Area	1018 (H) x 572 (V) [mm]	1018 (H) x 572 (V) [mm]
Brightness	1500 cd/m2 (versions high brightness)	700 cd/m2 (versions standard brightness)
Contrast ratio	3000:1	3000:1
View angle	H:178°, V:178°	H:178°, V:178°
Colors	16.7 M	16.7 M
Response time	6 ms	6 ms
Video inputs	1 x Dsub 15 HD RGB Analog[PC] (internal) 1 x DVI-D [Digital RGB] (internal) 1x HDMI (internal)	1 x Dsub 15 HD RGB Analog[PC] (internal) 1 x DVI-D [Digital RGB] (internal) 1x HDMI (internal)
Other inputs (option)	CVBS, Y/C, YPbPr	CVBS, Y/C, YPbPr
Audio (option)	Input : 0.5V to 1V , Output :2x 7W, glass speakers 10W	Input : 0.5V to 1V , Output :2x 7W, glass speakers 10W
Specs video inputs	VGA/DVI: VGA - WUXGA (1920x1080) HDMI: 480i/p, 576i/p, 720p, 1080p	VGA/DVI: VGA - WUXGA (1920x1080) HDMI: 480i/p, 576i/p, 720p, 1080p
Control interfaces	IR remote	IR remote
Video control	Serial port RS-232 (internal) Brightness, Contrast, Color, Sharpness Color temperature (5 selections) Still frame	Serial port RS-232 (internal) Brightness, Contrast, Color, Sharpness Color temperature (5 selections) Still frame
Video geometry	Auto adjustment of image dimensions Adjustable horizontal/vertical phase Preset formats (4:3, 16.9, 1:1)	Auto adjustment of image dimensions Adjustable horizontal/vertical phase Preset formats (4:3, 16.9, 1:1)
Diagnostics	Automatic management of fans Automatic overtemperature shutdown Monitor's status control Temperature and fans control through programmable threshold	Automatic management of fans Automatic overtemperature shutdown Monitor's status control Temperature and fans control through programmable threshold
Other sensors	Ambient light sensor Automatic brightness based on ambient light Proximity sensor (option) Shock sensor (option)	Ambient light sensor Automatic brightness based on ambient light Proximity sensor (option) Shock sensor (option)
Other	Standby mode Timer (time, wakeup, sleep) DPMS Input autoserch O.S.D. (On Screen Display) Presetting for WLAN antenna (internal)	Standby mode Timer (time, wakeup, sleep) DPMS Input autoserch O.S.D. (On Screen Display) Presetting for WLAN antenna (internal)
O.S.D. language	D, E, F, GB, I, P	D, E, F, GB, I, P
Dimensions	876x2290x290 (SS) 876x2290x290 (DS)	876x2135x290 (SS) 876x2135x290 (DS)
Power	115/230 VAC ± 15%, 50/60 Hz	115/230 VAC ± 15%, 50/60 Hz
Power consumption	IEC plug Single side: 1200 W (version with high brightness and AC on) Double side:1640 W (version with high brightness and AC on)	IEC plug Single face: 270 W (version with standard brightness) Double face : 550 W (version with standard brightness)
Operating conditions	Storing : -20° C to 65° C (max 85% RH no condensing) Operating: 0° C to 50° C (max 85% RH no condensing)	Storing : -20° C to 65° C (max 85% RH no condensing) Operating: 0° C to 50° C (max 85% RH no condensing)
Accessories	Power cable Remote control with batteries User manual	Power cable Remote control with batteries User manual
CONTROLLER	CONTROLLER	CONTROLLER
Processor	Intel Core 2 Duo T65xx (2.10 GHz - 2 Mb L2 cache)	Intel Core 2 Duo T65xx (2.10 GHz - 2 Mb L2 cache)
Default RAM	2 Gb DDR-3 SO-DIMM	2 Gb DDR-3 SO-DIMM
Max. RAM	4 Gb DDR-3 SO-DIMM	4 Gb DDR-3 SO-DIMM
Chipset	Nvidia ION	Nvidia ION
Slot	2 mini Cards	2 mini Cards
Socket DIMM	2 (1 free)	2 (1 free)
USB 2.0 / E-SATA /RS232	6 (2 fronti + 4 rear) / 1 / 1	6 (2 fronti + 4 rear) / 1 / 1
Hard Disk	250Gb SATA 2,5"	250Gb SATA 2,5"
Graphics	Nvidia ION	Nvidia ION
Audio	5.1 channels, Realtek ALC888 HD with S/PDIF	5.1 channels, Realtek ALC888 HD with S/PDIF
Smart Card Reader	SD / SDCH / MS / MS Pro / MMC	SD / SDCH / MS / MS Pro / MMC
Network adapter	Gigabit WOL PXE	Gigabit WOL PXE
Power supply	input voltage 100-240V	input voltage 100-240V
Power consumption	Max: 35 Watt / Average: 21 Watt / Standby: 1 Watt	Max: 35 Watt / Average: 21 Watt / Standby: 1 Watt
Eco mode	ACPI, EU RoHS, Energy Star 5.0	ACPI, EU RoHS, Energy Star 5.0
Operating conditions	temperature: 0° - 35° ; humidity 15-80	temperature: 0° - 35° ; humidity 15-80
Dimensions	165 L x 160 P x 48 H mm.	165 L x 160 P x 48 H mm.
Audio noise	less than 25 dBA	less than 25 dBA
Weight	less than 1.5Kg	less than 1.5Kg
Default operating system	Windows 7 Professional	Windows 7 Professional

**Hantarex TOTEM 57 600 cd IP30
SINGLE SIDE or DOUBLE SIDE**

Body: extruded painted aluminum
Interior: aluminum and steel
Front bottom: Alubond/ crystal front glass
Single Face
Double Face
Standard brightness
Without Air Conditioner
Optimized airflow

IP54 (57"SS) - IP30 (57" DS)

Compass opening
Laminated, antivandalism, antireflective or antiglare, antistatic, multilayer 3 mm+ 3mm + 0.38 mm PVB foil
Power with IEC plug 2P+G 230V 16A
CAT5 for LAN (RJ45)
Serial for tuning extender (RJ11)(option)
USB cable for access from USB 2.0 device
RAL9006 (or other on request)
On request

MONITOR

LCD TFT
57" (145 cm)
16:9
1920 (H) x 1080 (V) pixel (versions standard brightness)
0.65 [mm]
1349 (H) x 871 (V) [mm]
600 cd/m2
2000:1
H:178°, V:178°
16.7 M
8 ms
1 x Dsub 15 HD RGB Analog[PC] (internal)
1 x DVI-D [Digital RGB] (internal)
1x HDMI (internal)
CVBS, Y/C, YPbPr
Input : 0.5V to 1V , Output :2x 7W, glass speakers 10W
VGA/DVI: VGA - WUXGA (1920x1080)
HDMI: 480i/p, 576i/p, 720p, 1080p
IR remote
Serial port RS-232 (internal)
Brightness, Contrast, Color, Sharpness
Color temperature (5 selections)
Still frame
Auto adjustment of image dimensions
Adjustable horizontal/vertical phase
Preset formats (4:3, 16.9, 1:1)
Automatic management of fans
Automatic overtemperature shutdown
Monitor's status control
Temperature and fans control through programmable threshold
Ambient light sensor
Automatic brightness based on ambient light
Proximity sensor (option)
Shock sensor (option)
Standby mode
Timer (time, wakeup, sleep)
DPMS
Input autoserch
O.S.D. (On Screen Display)
Presetting for WLAN antenna (internal)
D, E, F, GB, I, P
1000x2250x170 (SS)
1016x2250x290 (DS)
115/230 VAC ± 15%, 50/60 Hz
IEC plug
Single side:495 W
Double side: 990 W
Storing : -20°C to 65°C (max 85% RH no condensing)
Operating: 0°C to 50°C (max 85% RH no condensing)
Power cable
Remote control with batteries
User manual

CONTROLLER

Intel Core 2 Duo T65xx (2.10 GHz - 2 Mb L2 cache)
2 Gb DDR-3 SO-DIMM
4 Gb DDR-3 SO-DIMM
Nvidia ION
2 mini Cards
2 (1 free)
6 (2 fronti + 4 rear) / 1 / 1
250Gb SATA 2,5"
Nvidia ION
5.1 channels, Realtek ALC888 HD with S/PDIF
SD / SDCH / MS / MS Pro / MMC
Gigabit WOL PXE
input voltage 100-240V
Max: 35 Watt / Average: 21 Watt / Standby: 1 Watt
ACPI, EU RoHS, Energy Star 5.0
temperature: 0° - 35°; humidity 15-80
165 L x 160 P x 48 H mm.
less than 25 dBA
less than 1.5Kg
Windows 7 Professional

**Hantarex TOTEM 70 600 cd IP54
SINGLE SIDE**

Body: extruded painted aluminum
Interior: aluminum and steel
Front bottom: Alubond
Single Face
Standard brightness
Without Air Conditioner
Optimized airflow

IP54

Compass opening
Laminated, antivandalism, antireflective or antiglare, antistatic, multilayer 3 mm+ 3mm + 0.38 mm PVB foil
Power with IEC plug 2P+G 230V 16A
CAT5 for LAN (RJ45)
Serial for tuning extender (RJ11)(option)
USB cable for access from USB 2.0 device
RAL9006 (or other on request)
On request

MONITOR

LCD TFT
70" (178 cm)
16:9
1920 (H) x 1080 (V) pixel (versions standard brightness)
0.80 [mm]
1251(H) x 704 (V) [mm]
600 cd/m2
1500:1
H:178°, V:178°
16.7 M
8 ms
1 x Dsub 15 HD RGB Analog[PC] (internal)
1 x DVI-D [Digital RGB] (internal)
1x HDMI (internal)
CVBS, Y/C, YPbPr
Input : 0.5V to 1V , Output :2x 7W, glass speakers 10W
VGA/DVI: VGA - WUXGA (1920x1080)
HDMI: 480i/p, 576i/p, 720p, 1080p
IR remote
Serial port RS-232 (internal)
Brightness, Contrast, Color, Sharpness
Color temperature (5 selections)
Still frame
Auto adjustment of image dimensions
Adjustable horizontal/vertical phase
Preset formats (4:3, 16.9, 1:1)
Automatic management of fans
Automatic overtemperature shutdown
Monitor's status control
Temperature and fans control through programmable threshold
Ambient light sensor
Automatic brightness based on ambient light
Proximity sensor (option)
Shock sensor (option)
Standby mode
Timer (time, wakeup, sleep)
DPMS
Input autoserch
O.S.D. (On Screen Display)
Presetting for WLAN antenna (internal)
D, E, F, GB, I, P
1140x2350x170 (SS)
1140x2350x290 (DS)
115/230 VAC ± 15%, 50/60 Hz
IEC plug
Single side: 580 W
-
Storing : -20°C to 65°C (max 85% RH no condensing)
Operating: 0°C to 50°C (max 85% RH no condensing)
Power cable
Remote control with batteries
User manual

CONTROLLER

Intel Core 2 Duo T65xx (2.10 GHz - 2 Mb L2 cache)
2 Gb DDR-3 SO-DIMM
4 Gb DDR-3 SO-DIMM
Nvidia ION
2 mini Cards
2 (1 free)
6 (2 fronti + 4 rear) / 1 / 1
250Gb SATA 2,5"
Nvidia ION
5.1 channels, Realtek ALC888 HD with S/PDIF
SD / SDCH / MS / MS Pro / MMC
Gigabit WOL PXE
input voltage 100-240V
Max: 35 Watt / Average: 21 Watt / Standby: 1 Watt
ACPI, EU RoHS, Energy Star 5.0
temperature: 0° - 35°; humidity 15-80
165 L x 160 P x 48 H mm.
less than 25 dBA
less than 1.5Kg
Windows 7 Professional

**Hantarex TOTEM 82 600 cd IP54
SINGLE SIDE**

Body: extruded painted aluminum
Interior: aluminum and steel
Front bottom: Alubond
Single Face
Standard brightness
Without Air Conditioner
Optimized airflow

IP54

Compass opening
Laminated, antivandalism, antireflective or antiglare, antistatic, multilayer 3 mm+ 3mm + 0.38 mm PVB foil
Power with IEC plug 2P+G 230V 16A
CAT5 for LAN (RJ45)
Serial for tuning extender (RJ11)(option)
USB cable for access from USB 2.0 device
RAL9006 (or other on request)
On request

MONITOR

LCD TFT
82" (208 cm)
16:9
1920 (H) x 1080 (V) pixel (versions standard brightness)
0.94 [mm]
1805(H) x 1015 (V) [mm]
600 cd/m2
2000:1
H:178°, V:178°
16.7 M
8 ms
1 x Dsub 15 HD RGB Analog[PC] (internal)
1 x DVI-D [Digital RGB] (internal)
1x HDMI (internal)
CVBS, Y/C, YPbPr
Input : 0.5V to 1V , Output :2x 7W, glass speakers 10W
VGA/DVI: VGA - WUXGA (1920x1080)
HDMI: 480i/p, 576i/p, 720p, 1080p
IR remote
Serial port RS-232 (internal)
Brightness, Contrast, Color, Sharpness
Color temperature (5 selections)
Still frame
Auto adjustment of image dimensions
Adjustable horizontal/vertical phase
Preset formats (4:3, 16.9, 1:1)
Automatic management of fans
Automatic overtemperature shutdown
Monitor's status control
Temperature and fans control through programmable threshold
Ambient light sensor
Automatic brightness based on ambient light
Proximity sensor (option)
Shock sensor (option)
Standby mode
Timer (time, wakeup, sleep)
DPMS
Input autoserch
O.S.D. (On Screen Display)
Presetting for WLAN antenna (internal)
D, E, F, GB, I, P
1325x2600x170 (SS)
115/230 VAC ± 15%, 50/60 Hz
IEC plug
Single side: 1070 W
-
Storing : -20°C to 65°C (max 85% RH no condensing)
Operating: 0°C to 50°C (max 85% RH no condensing)
Power cable
Remote control with batteries
User manual

CONTROLLER

Intel Core 2 Duo T65xx (2.10 GHz - 2 Mb L2 cache)
2 Gb DDR-3 SO-DIMM
4 Gb DDR-3 SO-DIMM
Nvidia ION
2 mini Cards
2 (1 free)
6 (2 fronti + 4 rear) / 1 / 1
250Gb SATA 2,5"
Nvidia ION
5.1 channels, Realtek ALC888 HD with S/PDIF
SD / SDCH / MS / MS Pro / MMC
Gigabit WOL PXE
input voltage 100-240V
Max: 35 Watt / Average: 21 Watt / Standby: 1 Watt
ACPI, EU RoHS, Energy Star 5.0
temperature: 0° - 35°; humidity 15-80
165 L x 160 P x 48 H mm.
less than 25 dBA
less than 1.5Kg
Windows 7 Professional



www.hantarex.com

HANTAREX INTERNATIONAL LIMITED

Head Office:

34 Salisbury Street

LONDON

NW8 8QE

TEL: +44(0) 20 8778 1414

FAX: +44(0) 20 8659 9348

www.hantarex.com

sales@hantarex.com



UNI EN ISO 9001:2000